




- Minimal mounting depth**
- High air volume**
- Functional design**
- Time-saving installation**
- Weather proof and UV resistant**

Filter fans are used to provide an optimum climate in enclosures. The interior temperature of an enclosure can be reduced by channelling cooler filtered outside air into the enclosure thus expelling heated internal air. The resulting air flow prevents formation of localized heat pockets and protects the electronic components from overheating. **Four integrated axial fans** provide a particularly high and uniform air circulation which contributes to higher reliability. The plastic used for the hood of this filter fan series is highly weather proof and UV light resistant.

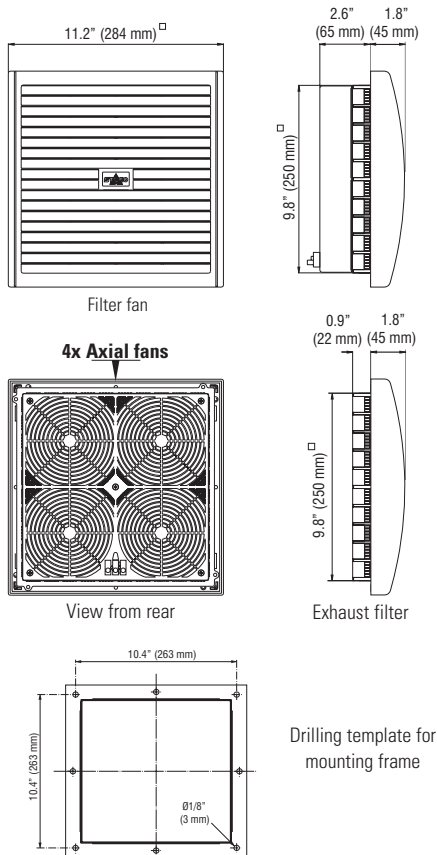

### Technical Data

<b>Axial fan, ball bearing</b>	service life min. 50,000h at 77°F (25°C) and 65% RH aluminum fan body, plastic rotor
<b>Connection</b>	3-pole clamp, AWG 14 (2.5mm <sup>2</sup> ), clamping torque 0.8Nm max.
<b>Housing (filter fan and exhaust filter)</b>	Plastic, UL 94V-0, light grey
<b>Hood (filter fan and exhaust filter)</b>	Plastic, UL 94V-0, light grey; weather proof and UV light resistant according to UL 746C (f1)
<b>Mounting frame</b>	with double-sided industrial adhesive for mounting to the outside of enclosure; certain operating circumstances may make the additional use of screws necessary; cut-out template included
<b>Filter media rating</b>	G4 acc. to DIN EN 779, filtering degree 94%
<b>Filter material</b>	synthetic fiber with progressive construction, temperature resistant to 212°F, self-extinguishing class F1; moisture resistant to 100% RH, reusable - can be cleaned by washing or vacuuming
<b>Operating / Storage temperature</b>	-49 to +158°F (-45 to +70°C)
<b>Protection class</b>	I (grounded)
<b>Protection type</b>	IP54*

\*Using fine filter media type F5 increases the protection type to IP55, but reduces the air volume  
Note: EMC versions and other voltages are available upon request

### FF 018 Filter Fan

Part No.	Operating voltage	Air volume, free blowing	Air volume with exhaust filter	Power consumption	Average noise level (DIN EN ISO 4871)	Mounting depth	Enclosure cut-out	Weight (approx.)	Approvals
01803.0-00	230VAC, 50Hz <sup>1)</sup>	177 cfm (300m <sup>3</sup> /h)	135 cfm (230m <sup>3</sup> /h)	60W	53dB (A)	2.6" (65mm)	9.8 x 9.8"	7.3 lbs. (3.30kg)	UL File No. E234324
01803.0-01	120VAC, 60Hz	202 cfm (345m <sup>3</sup> /h)	156 cfm (265m <sup>3</sup> /h)	60W	53dB (A)	2.6" (65mm)	9.8 x 9.8"	7.3 lbs. (3.30kg)	UL File No. E234324

<sup>1)</sup> air volume increases by 15% when operating 230VAC filter fans at 60Hz

### EF 118 Exhaust Filter

Part No.	Mounting depth	Enclosure cut-out	Weight (approx.)	Filter mat	Protection type
11803.0-00	0.9" (22mm)	9.8 x 9.8"	2.2 lbs. (1.0kg)	G4 acc. to DIN EN 779, filtering degree 94%	IP54*

\*using fine filter mats type F5 increases the protection type to IP55, but reduces the air volume.

### FM 086 / FFM 086 Filter Mats

Filter mat	9.7 x 9.7" (247 x 247mm)
G4 (1 packing unit = 3 pcs.)	Part No. 08608.0-00
F5 (1 packing unit = 3 pcs.)	Part No. 08609.0-00

For technical data regarding the integrated Airflow Monitor, please see LC 013/LCF 013 (Normally Closed, Normally Open)

Specifications are subject to change without notice. Suitability of this product for its intended use and any associated risks must be determined by the end customer/ buyer in its final application.