




**Continuous cross-connection**


ZQV 2.5N/20 (20-pole) and ZQV 4N/20 (20-pole) are ideal for shortening (e.g. with tool KT ZQV – 9002170000) to produce customised configurations with the required number of poles. More than 20 poles in a row are not recommended because of the resulting tolerances in the terminals.



**Special features of**


**WDU 2.5, WDU 4 and WDU 2.5/1.5/ZR**

- Parallel distribution of 3 potentials  
**Important!** Rated voltage reduced to 125 V!
- Parallel distribution of 2 potentials  
**Important!** Only when using the outer cross-connection holes at 400V
- The middle cross-connection hole can be used for either ZQV or WQV

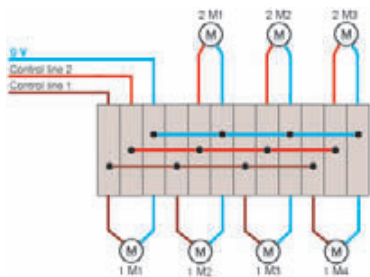

**Important!** For shortened ZQV located adjacent to each other (with bare cut edges), end plates or partition plates are necessary for rated voltage of 250 V.


**ZQV 2.5N**

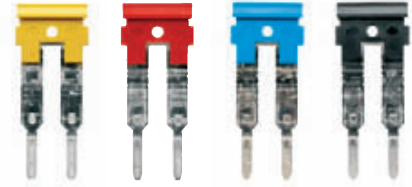

No. of poles	Type	I [A]	Qty	Order No. yellow	Order No. red	Order No. blue	Order No. black
2	ZQV 2.5N/2	24	60	1693800000	1717900000	1717990000	1718080000
3	ZQV 2.5N/3	24	60	1693810000	1717910000	1718000000	1718090000
4	ZQV 2.5N/4	24	60	1693820000	1717920000	1718010000	1718100000
5	ZQV 2.5N/5	24	20	1693830000	1717930000	1718020000	1718110000
6	ZQV 2.5N/6	24	20	1693840000	1717940000	1718030000	1718120000
7	ZQV 2.5N/7	24	20	1693850000	1717950000	1718040000	1718130000
8	ZQV 2.5N/8	24	20	1693860000	1717960000	1718050000	1718140000
9	ZQV 2.5N/9	24	20	1693870000	1717970000	1718060000	1718150000
10	ZQV 2.5N/10	24	20	1693880000	1717980000	1718070000	1718160000
20	ZQV 2.5N/20	24	20	1909000000	1909110000	1909140000	1909130000
				<b>For standard terminal</b>		<b>For compact terminal</b>	
				WDU 2.5/1.5 ZR		WDU 2.5N	
				WDU 2.5		WDK 2.5N	
				WDK 2.5/ ZQV		WDK 2.5N V	
				WDU 1.5 BLZ 5.08/ ZQV		WDK 2.5N DU-PE	

E

**ZQV 4N**

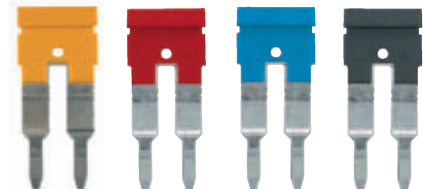

No. of poles	Type	I [A]	Qty	Order No. yellow	Order No. red	Order No. blue	Order No. black
2	ZQV 4N/2	32	60	1758250000	1793950000	1793960000	1793970000
3	ZQV 4N/3	32	60	1762630000	1793980000	1793990000	1794000000
4	ZQV 4N/4	32	60	1762620000	1794010000	1794020000	1794030000
5							
6							
7							
8							
9							
10	ZQV 4N/10	32	20	1758260000	1794040000	1794050000	1794060000
20	ZQV 4N/20	32	20	1909020000	1909150000	1909100000	1909120000
				<b>For standard terminal</b>		<b>For compact terminal</b>	
				WDU 4		WDU 4N	
				WTR 4		WDK 4N	
				WTR 4 SI		WDK 4N V	
				WTR 4 SL		WDK 4N DU-PE	
				WTR 4/ZZ+ZR			
				WDU/PE4/ZZ+ZR			